
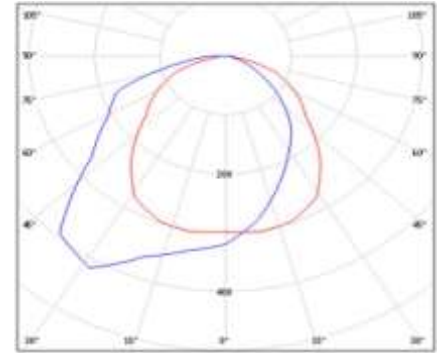
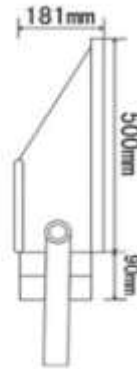


LAMP TYPE	High Frequency Internal Induction
APPLICATION	Floodlighting, Security, Billboards, Advertising
WORK HEIGHT	5 ~ 9 m
WORK ANGLE	90°

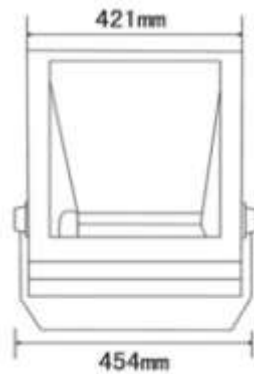

LAMP POWER	160W	
TOTAL POWER	165W	
LUMENS	9 900 lm	
RANGE OF ILLUMINATION	5 m	10.4 x 11 m
	7 m	11 x 11.5 m
	9 m	18 m x 19 m
LIFESPAN	60 000 h	
COLOUR TEMPS	Warm/Cool White	
CRI	Ra > 80	

POWER FACTOR	> 0.95
VOLTAGE	AC 180 - 250 V
WORKING TEMP	-20°C to 50°C
DIMENSIONS	454 x 590 x 181 mm
WEIGHT	11.3 kg
IP RATING	IP65
PROTECTION	Glass Cover
MATERIAL	Aluminium Alloy
CERTIFICATION	CE, UL, RoHS

The biggest floodlight in our range, the SCFGH*165 induction floodlight provides a broad spread of light particularly useful in applications where security is a concern. Using high-intensity die-cast aluminium with an external static thermal plastic spray, this lamp protects against the elements making it perfect for outdoor use. Other areas of application include billboard illumination, parking lots and public squares. The lamp system will reach 70% of its original brightness after 60 000 hours whilst failure can be expected after approximately 100 000 hours.

PACKAGING: Cardboard box, polystyrene protected.

INSTALLING: Direct connection to 220V power, screw-in induction bulb.

WARRANTY: 3-year manufacturing warranty - incorrect operation, misuse or unqualified installation could result in the warranty being voided. Please contact Lighting Revolution for further explanation on these guidelines.

PRICE: Please contact Lighting Revolution for an official quotation.